


CHECK VALVES

Features:

- Sizes: 1", 1 1/4", and 2"
- Heavy duty lead-free red brass body for increased strength, durability, and corrosion resistance
- Pressure tested to 200 PSI
- Temperature rated to 180 f
- Poppet-style valve for positive sealing and minimal flow restriction
- Spool design further eliminates sticking points
- Nitrile Rubber Washer
- Smooth, quiet operation whether installed vertically or horizontally
- NSF/ANSI/CAN 372 certified

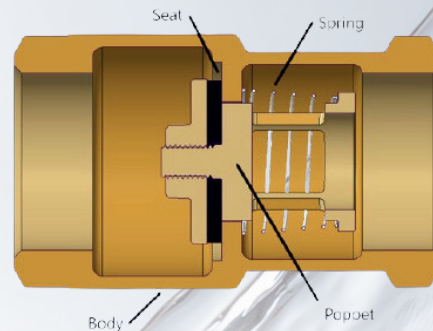

Tested and certified by WQA to
NSF/ANSI/CAN-372



C USA
NSF / ANSI 372
LEAD FREE

Part No	Size	Load Rating:
MCV010	1"	4,000 LBS
MCV012	1 1/4"	5,000 LBS
MCV020	2"	6,000 LBS

